

Mild steel fittings for many applications



## Cabinet Butt Hinge

Size	38mm (1.1/2")	50mm (2")	63mm (2.1/2")	
Length	38mm	50mm	63mm	
Width open	26mm	32mm	36mm	
Thickness	1.0mm	1.2mm	1.3mm	
Screw holes	4	6	6	
Screw size	4	4	6	
Bulk Packed	500	200	500	
Electro-brassed	5038 0 12 02	5050 0 12 02	5063 0 12 02	
<b>LIGHT DUTY</b>				



## Backflap Hinge

Size	25mm (1")	31mm (1.1/4")	38mm (1.1/2")	50mm (2")
Size	25mm	31mm	38mm	50mm
Width open	75mm	81mm	90mm	106mm
Thickness	1.6mm	1.6mm	1.6mm	1.8mm
Screw holes	6	6	6	6
Screw size	6	7	8	8
Bulk Packed	500	400	200	200
<b>LIGHT DUTY</b>				



## Table Hinge

Size	31mm (1.1/4")	38mm (1.1/2")		
Size	31mm	38mm		
Width open	78mm	88mm		
Thickness	1.6mm	1.9mm		
Screw size	5	6		
Bulk Packed	400	200		
Self-coloured	4231 0 12 01	4238 0 12 01		
Florentine-bronzed	4231 0 12 03			
<b>LIGHT DUTY</b>				

MADE IN BRITAIN  
 UK service support  
 Low carbon footprint  
 Quality materials  
 Choice of finishes  
 ISO 9001:2015  
 Manufacturer

For sales call 01255 422333 or email [sales@nico.co.uk](mailto:sales@nico.co.uk)

## Recommended Duty

In order to help you select the most suitable hinge for a particular application, we supply a guide to hinge fitting and usage.

### LIGHT

Low frequency of use by those with high incentive to exercise care, for example, private house owners, and with small chance of accident occurring or misuse.

## Product Finishes

### SC Self-coloured Code 01

Corrosion-resistance: None

Applications: Internal, secondary finish

### EB Electro-brassed Code 2

Corrosion-resistance: Poor

Applications: Decorative, internal

### FB Florentine-bronzed Code 03

Corrosion-resistance: Poor

Applications: Decorative, internal

Other finishes are available on request.

## Hinge Maintenance

Hinges are supplied dry in order to ease handling and prevent the transfer of oily marks to hinges and doors during fitting. In most cases, hinges should be oiled immediately after installation. This and the occasional application of oil during service should significantly reduce wear.

### Available to order

Products indicated with the Telephone Symbol are available to order only. Please ring for details and lead times.



ISO 9001 Cert No: Q 09355

### Nico Manufacturing Ltd


Oxford Road, Clacton-on-Sea  
Essex CO15 3TJ, England.

Tel: 01255 422333


Fax: 01255 432909

E-mail: sales@nico.co.uk

Web: www.nico.co.uk

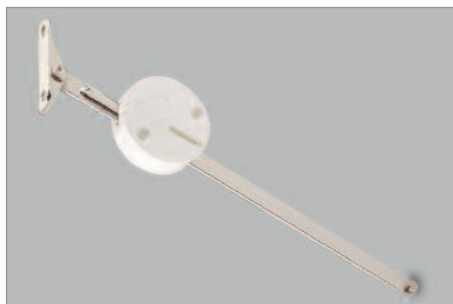


## Lift Up Flap Stay

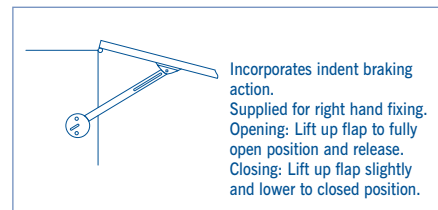

Type	SMALL	MEDIUM		
Length	159mm	210mm		
Width	9.5mm	9.5mm		
End bracket	44 x 14mm	44 x 14mm		
Hole centres	32mm	32mm		
Screw size	5	5		
Bulk Packed	250	250		
Bright nickel-plated	7115 2 00 15	7120 2 00 15		
Plastic housing	250	250		
White	7100 0 00 80	7100 0 00 80		




## Sliding Stay



Type	MEDIUM			
Length	230mm			
Width	9.5mm			
End bracket	44 x 14mm			
Slide plate	46 x 13mm			
Hole centres	32mm			
Screw size	5			
Bulk Packed	250			
Bright electro-brassed	7020 0 00 12			



## Adjustable Sliding Stay

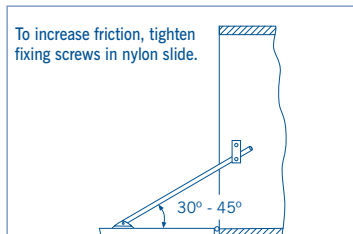

Type	MEDIUM			
Length	200mm			
Width	9.5mm			
End bracket	44 x 14mm			
Slide plate	35 x 13mm			
Screw size	5			
Bulk Packed	200			
Brown/Bright nickel-plated	7040 0 00 15			